



A&T MAGNETIC CO.,LTD.

8F-1,NO.23,LANE 169,KANG NING ST.,
SIJHIH CITY,TAIPEI COUNTY,22180,TAIWAN, R.O.C.
TEL:886-2-2695-3400 FAX:886-2-2695-0375
E-mail:coregain@ms56.hinet.net
aandt@ms10.hinet.net

AT5K T15445

Appearance & shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)


- Effective Length(L_e): 1639.0mm
- Effective Area(A_e): 349mm²
- Effective Area(A_{Min}): 349mm²
- Effective Volume(V_e): 577334mm³

Approximate weight:3056g/pc

T15445 (Un-Coated)

Test Conditions:10 KHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial permeability(μ_{iac})	AL Value(nH)	Ordering code
AT5K	5000± 20%	28475+30%/-20%	AT5K T15445

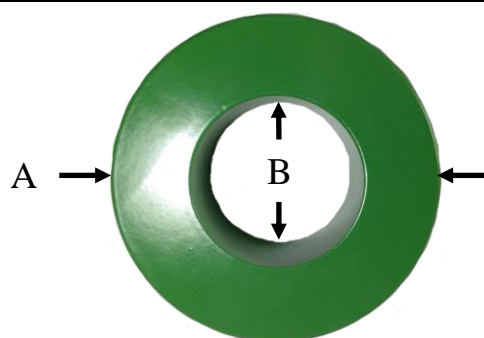

Dimensions : (Un-coated Cores)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	154	157	151
B	80	82	78
C	45	43.8	46.2

美台磁材有限公司

台北縣汐止市康寧街169巷23號8樓之1